

**This Page Is Inserted by IFW Operations  
and is not a part of the Official Record**

## **BEST AVAILABLE IMAGES**

**Defective images within this document are accurate representations of the original documents submitted by the applicant.**

**Defects in the images may include (but are not limited to):**

- **BLACK BORDERS**
- **TEXT CUT OFF AT TOP, BOTTOM OR SIDES**
- **FADED TEXT**
- **ILLEGIBLE TEXT**
- **SKEWED/SLANTED IMAGES**
- **COLORED PHOTOS**
- **BLACK OR VERY BLACK AND WHITE DARK PHOTOS**
- **GRAY SCALE DOCUMENTS**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification:</b> <b>G03F 7/20</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/67074</b> <b>(43) International Publication Date:</b> 09 November 2000 (09.11.2000)
<b>(21) International Application Number:</b> PCT/US00/05658 <b>(22) International Filing Date:</b> 03 March 2000 (03.03.2000) <b>(30) Priority Data:</b> 09/302,561 30 April 1999 (30.04.1999) US <b>(60) Parent Application or Grant</b> MENTOR GRAPHICS, INC. [/]; (). COBB, Nicolas, Bailey [/]; (). AUYEUNG, Aloysuis, T., C.; ().		<b>Published</b>
<b>(54) Title: STREAMLINED IC MASK LAYOUT OPTICAL AND PROCESS CORRECTION THROUGH CORRECTION REUSE</b> <b>(54) Titre: CORRECTIONS RATIONALISEES DES DISTORSIONS DUES AU TRAITEMENT ET DES DISTORSIONS OPTIQUES PERMETTANT LE TRACE D'UN MASQUE DE CIRCUIT INTEGRE ET INTEGRANT DES CORRECTIONS ANTERIEURES</b>  <b>(57) Abstract</b> <p>An EDA tool is provided with an OPC module that performs optical and/or process pre-compensations on an IC mask layout in a streamlined manner, reusing determined corrections for a first area on a second area, when the second area is determined to be equivalent to the first area for OPC purposes. The OPC module performs the correction on the IC mask layout on an area-by-area basis, and the corrections are determined iteratively using model-based simulations, which in one embodiment, include resist model-based simulations as well as optical model-based simulations.</p> <b>(57) Abrégé</b> <p>L'invention se rapporte à un outil d'automatisation de conception électronique (EDA) comportant un module de précompensations optiques (OPC) qui effectue, de manière rationalisée, des précompensations optiques et/ou de traitement lors du tracé d'un masque de circuit intégré, en réutilisant, pour une seconde zone, des corrections déterminées précédemment pour une première zone, lorsque ladite seconde zone est évaluée comme étant équivalente à la première zone s'agissant de l'application de précompensations optiques. Le module OPC effectue la correction sur le tracé du masque de circuit intégré, zone après zone, et les corrections sont déterminées de manière itérative, au moyen de simulations fondées sur un modèle, qui incluent, dans une réalisation de l'invention, des simulations fondées sur un modèle de résine ainsi que des simulations fondées sur un modèle optique.</p>		

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : <b>G03F 7/20</b>		<b>A1</b>	(11) International Publication Number: <b>WO 00/67074</b>
			(43) International Publication Date: <b>9 November 2000 (09.11.00)</b>
(21) International Application Number: <b>PCT/US00/05658</b> (22) International Filing Date: <b>3 March 2000 (03.03.00)</b> (30) Priority Data: 09/302,561          30 April 1999 (30.04.99)          US (71) Applicant: <b>MENTOR GRAPHICS, INC. [US/US]; 8005 S.W. Boeckman Road, Wilsonville, OR 97070 (US).</b> (72) Inventor: <b>COBB, Nicolas, Bailey; 1632 Willow Lake Lane, San Jose, CA 95131 (US).</b> (74) Agents: <b>AUYEUNG, Aloysius, T., C. et al.; Blakely, Sokoloff, Taylor &amp; Zafman, 7th floor, 12400 Wilshire Boulevard, Los Angeles, CA 90025-1026 (US).</b>		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: STREAMLINED IC MASK LAYOUT OPTICAL AND PROCESS CORRECTION THROUGH CORRECTION REUSE

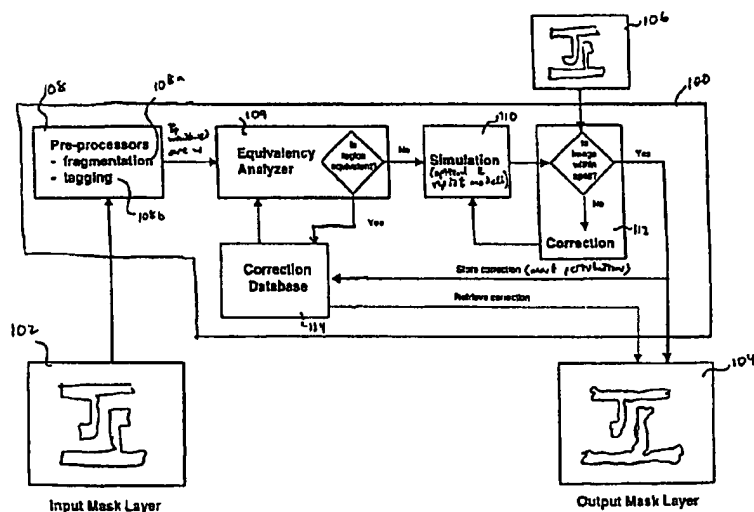

(57) Abstract

An EDA tool is provided with an OPC module that performs optical and/or process pre-compensations on an IC mask layout in a streamlined manner, reusing determined corrections for a first area on a second area, when the second area is determined to be equivalent to the first area for OPC purposes. The OPC module performs the correction on the IC mask layout on an area-by-area basis, and the corrections are determined iteratively using model-based simulations, which in one embodiment, include resist model-based simulations as well as optical model-based simulations.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**Description**

5

10

15

20

25

30

35

40

45

50

55

**Streamlined IC Mask Layout Optical And Process Correction  
Through Correction R use**

**BACKGROUND OF THE INVENTION**

**1. Field of the Invention**

The present invention relates to the field of integrated circuit (IC) design. More specifically, the present invention relates to the application of optical and process pre-compensations to an IC mask layout.

**2. Background Information**

Over the years, because of the ever increasing complexity of IC designs, IC designers have become more and more reliant on electronic design automation (EDA) tools to assist them in designing ICs. These tools span the entire design process, from synthesis, placement, routing, to layout verification.

In the case of sub-micron ICs, designers are increasingly reliant on EDA tools to make the necessary pre-compensations (also referred to as corrections) to the edges of various geometries of an IC mask layout, to achieve the desired sub-micron IC images, as the "critical dimension" of the line-width becomes smaller than the wavelength of the light source. (The term mask as used herein is intended to include reticle also.) The various techniques for automatically making these corrections are commonly referred to as optical proximity corrections or optical and process corrections. In the later case, pre-compensations are made for process as well as optical distortions. Whether it is just for optical distortions only or for both types of distortions, hereinafter, all pre-compensations will be generically referred to as OPC.

Generally speaking, OPC techniques can be classified as rule-based techniques or model-based techniques. Under rule-based techniques, certain

5 predetermined corrections are made if certain pre-specified conditions are  
detected, e.g. when certain geometric features are employed in the presence of  
certain other features within certain critical distances. Under model-based  
10 techniques, the corrections are calculated through computer simulations  
employing various models, e.g. optical models. Thus, generally speaking, rule-  
based techniques are less accurate, but they are less computationally intensive.  
On the other hand, model-based techniques are more accurate, but they are  
15 more computationally intensive. Furthermore, for certain large ICs, some model-  
based techniques border on impractical, as they require very powerful computing  
systems. Therefore, designers of complex ICs are often faced with this difficult  
choice of accuracy versus computational efficiency.

20 Thus, a more streamlined model-based OPC technique that offers the  
desired improved accuracy but with less of the computational burden is desired.

#### 25 SUMMARY OF THE INVENTION

An EDA tool is provided with an OPC module that performs optical and/or  
30 process pre-compensations on an IC mask layout in a streamlined manner,  
reusing determined corrections for a first area on a second area, when the  
second area is determined to be equivalent to the first area for OPC purposes.  
The OPC module performs the correction on the IC mask layout on an area-by-  
35 area basis, and the corrections are determined iteratively using model-based  
simulations, which in one embodiment, include resist model-based simulations as  
well as optical model-based simulations.

#### 40 BRIEF DESCRIPTION OF DRAWINGS

The present invention will be described by way of exemplary embodiments,  
45 but not limitations, illustrated in the accompanying drawings in which like  
references denote similar elements, and in which:

5           **Figure 1** illustrates an overview of the present invention in accordance with  
on embodiment;

**Figure 2** illustrates the concept of fragmenting an edge of a geometry  
feature of an IC mask layout;

10           **Figures 3a-3b** illustrate the concept of windowed area for OPC analysis;

**Figure 4** further illustrates a correction database in accordance with one  
embodiment;

15           **Figure 5** illustrates the operational flow of the OPC module in accordance  
with one embodiment;

**Figure 6** illustrates an example EDA tool incorporated with the OPC  
module of the present invention, in accordance with one embodiment; and

20           **Figure 7** illustrates an example computer system suitable to be  
programmed with the programming instructions implementing the EDA tool of Fig.  
6.

25           **DETAILED DESCRIPTION OF THE INVENTION**

30           In the following description, various aspects of the present invention will be  
described, and various details will be set forth in order to provide a thorough  
understanding of the present invention. However, it will be apparent to those  
skilled in the art that the present invention may be practiced with only some or all  
35           aspects of the present invention, and the present invention may be practiced  
without the specific details. In other instances, well known features are omitted or  
simplified in order not to obscure the present invention.

40           Parts of the description will be presented using terminology commonly  
employed by those skilled in the art to convey the substance of their work to others  
skilled in the art, such as mask layouts, geometries, model-based simulations and  
so both. Also, parts of the description will also be presented in terms of operations  
45           performed by a computer system, using terms such as determining, generating and  
so forth. As well understood by those skilled in the art, these operations and  
quantities operated on, take the form of electrical, magnetic, or optical signals



capable of being stored, transferred, combined, and otherwise manipulated through electrical/optical components of a digital system; and the term digital system includes general purpose as well as special purpose data processing machines, systems, and the like, that are standalone, adjunct or embedded.

Various operations will be described as multiple discrete steps performed in turn in a manner that is most helpful in understanding the present invention. However, the order of description should not be construed as to imply that these operations are necessarily performed in the order they are presented, or even order dependent. Lastly, repeated usage of the phrase "in one embodiment" does not necessarily refer to the same embodiment, although it may.

Referring now to **Figure 1**, wherein a block diagram illustrating an overview of the present invention in accordance with a number of embodiments is shown. Shown is OPC module **100** incorporated with the teachings of the present invention, which includes automatic performance of OPC to IC mask layout **102**, on an area-by-area basis, to generate corrected IC mask layout **104**. In particular, OPC module **100** reuses corrections determined for a first area on a second area, when the second area is considered to be equivalent to the first area for OPC purposes. As a result, the amount of computations required to perform OPC on IC mask layout **102** to generate IC mask layout **104** are substantially reduced.

For the illustrated embodiment, OPC module **100** includes a number of pre-processors **108**, equivalency analyzer **109**, simulator **110**, correction post-processor **112**, and correction database **114**, operationally coupled to each other as shown. Pre-processors **108** include in particular, fragmentation pre-processor **108a** and tagging pre-processor **108b**. Pre-processors **108** collectively pre-process the formal description of IC mask layout **102** to prepare the descriptive data for the subsequent analyses to determine the appropriate correction. In particular, pre-processors **108** collectively prepare the descriptive data to enable the subsequent analyses to be efficiently performed in accordance with the

streamlined approach of the present invention, that is allowing the determined corrections for one area to be efficiently reused for another OPC equivalent area. Equivalency analyzer 109 performs pattern recognition analysis to determine if two areas are "equivalent" for OPC purposes, on an area-by-area basis. If equivalent, analyzer 109 further causes the earlier determined corrections to be reused on the area to avoid repeating the costly re-computations. Simulator 110 performs for each "unique" area, model-based analyses to determine the appropriate corrections for the particular "unique" area. Correction post-processor 112 makes the determined corrections for each area. For each "unique" area, the simulation and correction process is performed multiple times, iteratively, referencing desired results 106, until the corrected mask layout is considered to be sufficiently pre-compensated that it is likely to yield the desired image, within a predetermined tolerance level. Correction database 114 stores the data necessary to allow two areas to be compared and determined whether they are equivalent for OPC purposes. Furthermore, correction database 114 stores the data necessary to allow the corrections determined for one area to be reused for another area, when the latter area is determined to be equivalent to the former area for OPC purposes.

Continuing to refer to Fig. 1, for the illustrated embodiment, IC mask layout 102 is described in GDS II format, comprises of polygons and paths, more specifically, vertices of polygons and paths, among other things. Fragmentation pre-processor 108a takes each edge of the geometries, and injects additional "vertices" to further fragment the edge into multiple edge segments or fragments, for analysis purpose, thereby improving the resolution of the subsequent analyses performed to determine the appropriate corrections (see. Fig. 2). As those skilled in the art will appreciate, such injection of additional vertices and fragmentation of the edges into multiple edge fragments result in substantial increase in computational cost for the subsequent simulation analyses. As will be described in more details below, to alleviate this substantial increase in computational cost for the improved accuracy, equivalency analyzer 109 advantageously ensures the costly computations are performed only once for each OPC "unique" area, and

reuses the determined corrections on equivalent areas, from an OPC perspective. To facilitate efficient performance of the equivalent analysis by analyzer 109, tagging pre-processor 108b employs tag identifiers to characterize the geometric features of each area of IC mask layout 102. Examples of tag identifiers are identifiers that characterize an edge fragment as a vertical edge fragment, a horizontal edge fragment, an edge fragment adjacent to a line end edge fragment, a concave corner edge fragment, and so forth. Tagging is the subject of co-pending application, number <to be inserted>, entitled "Improved Method and Apparatus For Sub-micron IC Design Using Edge Fragment Tagging", and filed contemporaneously with the present application, which is hereby fully incorporated by reference.

For the illustrated embodiment, equivalency analyzer 109 efficiently performs the equivalent analysis on an "windowed area"-by-"windowed area" basis. A windowed area encircles and includes an original area. The windowed area is created by enlarging the perimeter of the original area by an encircling ring of immediately adjacent areas to be included for OPC analysis. The size of the encircling ring is defined by a window dimension ( $d_w$ ). Geometry features disposed within this encircling area are considered to be significant from an OPC analysis point of view (see Fig. 3a-3b). In alternate embodiments, different  $d_w$  may be employed for different enlargement directions. Analyzer 109 compares the geometric features of a windowed area against the geometric features of a previously corrected windowed area (in its pre-correction state), using the tag identifiers tagged against the edge fragments by tagging pre-processor 108b. In one embodiment, two windowed areas are considered equivalent if and only if the two areas are identical in all aspects, that is the number, size and relative locations of the geometric features. In other embodiments, two windowed areas are considered equivalent if the two windowed areas have the same number of geometric features, and the sizes and relative locations of the geometric features are all within predetermined tolerance levels. In yet other embodiments, other criteria may be employed instead to determine equivalency. Simulator 110 performs the simulation analyses for the windowed unique areas of IC mask

5 layout 102, using both resist as well as optical models. In one embodiment, the resist model employed is a variable threshold resist (VTR) model.

10 Finally, correction database 114 is employed to store the description data of each windowed OPC unique area of an IC mask layout, and the corrected state of each of these windowed OPC unique areas (see Fig. 4). In an alternate  
15 embodiment, in lieu of the corrected state of each of these windowed OPC unique areas, the corrections, also referred to as mask perturbations, to be made to each of the windowed OPC unique area are stored instead. In yet another  
20 embodiment, both the corrections, i.e. the mask perturbations, as well as the corrected states of the windowed OPC unique areas are stored.

25 Except for the advantageous employment of correction database 114 to store the data necessary, and their usage to reuse corrections determined through simulations for one area on another area that is considered to be OPC  
30 equivalent to the earlier area, pre-processors 108 (exclusion of tagging pre-processor 108b), simulator 110 and correction post processors 112, (exclusion of equivalency analyzer 109) have been otherwise previously described in detail in Cobb et al., "Large area phase-shift mask design", In Proceedings of SPIE  
35 Symposium on Optical Microlithography, Vol. 2197, pages 348-360, 1994; Cobb et al., "Fast low complexity mask design", In Proceedings of SPIE Symposium on Optical Microlithography, Vol. 2440, pages 313-327, 1995; Cobb et al., "Fast sparse aerial image calculation for OPC", In Proceedings of BACUS Symposium  
40 on Photomask Technology", Vol. 2621, pages 534-545, 1995; Cobb et al., "A Mathematical and CAD framework for Proximity Correction", In Proceedings of SPIE Symposium on Optical Microlithography, Vol. 2726, pages 348-360, 1996;  
45 and Cobb et al., "Experimental Results on Optical Proximity Corrections with Variable Threshold Resist Model", In Proceedings of SPIE Symposium on Optical Microlithography X, Vol. 3051, pages 458-468, 1997. These articles are hereby fully incorporated by reference.

5 Referring now to **Figure 5**, where in a flow diagram illustrating the  
operational flow of the above described OPC module in accordance with one  
embodiment is shown. (The parenthesized reference numbers refer to elements  
of **Fig. 1**.) As illustrated, at **502**, the fragmentation pre-processor (**108a**)  
10 fragments edges and the tagging pre-processor (**108b**) tags edge fragments of an  
IC mask layout (**102**). At **504**, the equivalency analyzer (**109**) selects a windowed  
area of the IC mask layout for analysis. The order of analysis is unimportant. In  
one embodiment, it is systematic, in another, it is arbitrary. At **506**, the analyzer  
15 (**109**) determines if the windowed area is equivalent to a previously corrected  
windowed area. For the illustrated embodiment, the analyzer (**109**) retrieves the  
descriptive data of the pre-correction state of a previously corrected windowed  
area from a correction database (**114**). The equivalent analysis is efficiently  
20 performed using the tag identifiers applied by tagging pre-processor (**109**).

25 If the windowed area is determined to be OPC equivalent to a previously  
corrected area, the process continues at **508**, where the analyzer (**109**) merely  
causes the previously determined corrections to be reused on the area to avoid  
the necessity having to re-perform the timely simulations. In one embodiment,  
30 the analyzer (**109**) causes the corrected state of the previously corrected area to  
be retrieved and output from correction database (**114**). In another embodiment,  
the analyzer (**109**) causes the previous determined corrections or mask  
perturbations to be retrieved from correction database (**114**) and applied to the IC  
35 mask layout (**102**) by correction post-processor (**112**).

40 On the other hand, if the windowed area is determined to be non-  
equivalent to any of the previously corrected areas, from an OPC perspective, the  
process continues at **510**, where the simulator (**110**), in conjunction with  
correction post-processor (**112**), iteratively determines the corrections to be made.  
Upon determining and applying the determined corrections, at **514**, simulator  
45 (**110**) and correction post-processor (**112**) further save the data necessary for the  
determined corrections to be subsequently reused on another OPC equivalent  
windowed area. Simulator (**110**) and/or correction post-processor (**112**) save the  
50

5       descriptive data of the pre-correction state of the windowed area into correction  
database (114). Additionally, in one embodiment, correction post-processor (112)  
also saves the corrected state of the windowed area. In another embodiment,  
10       correction post-processor (112) saves the corrections to be applied instead. In  
yet another embodiment, correction post-processor (112) saves both.

15       From operation 508 or 514, the process continues at 516, where analyzer  
(109) determines if all areas have been processed. Analyzer (109) repeats the  
process from operation 504 through operation 514, selectively invoking simulator  
(110) and correction post-processor (112) as many times as it is necessary, until  
20       all areas of IC mask layout (102) have been processed and corrected.

25       Referring now to Figure 6, wherein an EDA tool incorporated with the OPC  
module of the present invention in accordance with one embodiment is shown.  
As illustrated, EDA tool suite 600 includes OPC module 602 incorporated with the  
teachings of the present invention as described earlier with references to Fig. 1-5.  
Additionally, EDA tool suite 600 includes other tool modules 604. Examples of  
30       these other tool modules 602 include but not limited to synthesis module, phase  
assignment module, layout verification module and so forth.

35       Figure 7 illustrates one embodiment of a computer system suitable for use  
to practice the present invention. As shown, computer system 700 includes  
processor 702 and memory 704 coupled to each other via system bus 706.  
Coupled to system bus 706 are non-volatile mass storage 708, such as hard  
40       disks, floppy disk, and so forth, input/output devices 710, such as keyboard,  
displays, and so forth, and communication interfaces 712, such as modem, LAN  
interfaces, and so forth. Each of these elements perform its conventional  
functions known in the art. In particular, system memory 704 and non-volatile  
45       mass storage 708 are employed to store a working copy and a permanent copy of  
the programming instructions implementing the above described teachings of the  
present invention. System memory 704 and non-volatile mass storage 706 may

5 also be employed to store the IC designs. The permanent copy of the  
programming instructions to practice the present invention may be loaded into  
non-volatile mass storage 708 in the factory, or in the field, using distribution  
10 source/medium 714 and optionally, communication interfaces 712. Examples of  
distribution medium 714 include recordable medium such as tapes, CDROM,  
DVD, and so forth. In one embodiment, the programming instructions are part of  
a collection of programming instructions implementing EDA tool 600 of Fig. 6.  
15 The constitution of elements 702-714 are well known, and accordingly will not be  
further described.

20 In general, those skilled in the art will recognize that the present invention  
is not limited to the embodiments described. Instead, the present invention can  
be practiced with modifications and alterations within the spirit and scope of the  
appended claims. The description is thus to be regarded as illustrative, instead of  
25 restrictive on the present invention.

Thus, a streamlined approach to performing optical and process corrections  
30 to an IC mask layout, through correction reuse, has been described.

---

Claims

5

10

15

20

25

30

35

40

45

50

55



CLAIMS

What is claimed is:

1. A method for performing OPC on an IC mask layout comprising:  
determining OPC for the IC mask layout on an area-by-area basis, each  
area being an aerial subset of the IC mask layout;  
reusing the determined OPC for a first area on a second area if the second  
area is considered to be equivalent to the first area for OPC purposes.
2. The method of claim 1, wherein said OPC for each area is determined  
iteratively employing model-based simulations.
3. The method of claim 2, wherein said model-based simulations include  
resist as well as optical model-based simulations.
4. The method of claim 3, wherein each of said resist model-based  
simulations employs a variable threshold resist model.
5. The method of claim 2, wherein each of said model-based simulations  
includes geometries of an adjacent neighboring area that are within an  
enlargement distance from the area for which the model-based simulation is  
being performed.
6. The method of claim 1, wherein the method further comprises determining  
if each area is equivalent to any one of the previously corrected areas, prior to the  
application of the corrections, for OPC purposes.
7. The method of claim 6, wherein the method further comprises selectively  
tagging geometries of each area with tag identifiers to characterize the  
geometries to facilitate efficient performance of said equivalency determination.

5           8.     The method of claim 1, wherein the method further comprises saving the determined OPC, and pre-correction states of the corresponding corrected areas.

10           9.     The method of claim 8, wherein said reusing comprises retrieving for the second area, the saved OPC determined for the first area, and applying the retrieved OPC to the second area.

15           10.    The method of claim 1, wherein the method further comprises saving the corrected areas in their corrected states as well as their pre-correction states.

20           11.    The method of claim 10, wherein said reusing comprises retrieving for the second area, the corrected first area in its corrected state, and generating a copy for use as the corrected second area.

25           12.    An article of manufacture comprising  
a recordable medium having recorded thereon programming instructions  
for use to program a computer system to enable the computer system to be able  
to determine OPC for an IC mask layout on an area-by-area basis, each area  
30           being an aerial subset of the IC mask layout, and to reuse the determined OPC  
for a first area on a second area if the second area is considered to be equivalent  
to the first area for OPC purposes.

35           13.    The article of claim 12, wherein said programming instructions enable the computer system to determine the OPC for each area iteratively employing model-based simulations.

40           14.    The article of claim 13, wherein said programming instructions enable the computer system to include resist as well as optical model-based simulations when performing said model-based simulations.

5           15.    The article of claim 14, wherein said programming instructions enable the computer system to employ a variable threshold resist model when performing a resist model-based simulation.

10           16.    The article of claim 13, wherein said programming instructions enable the computer system to include, when performing a model-based simulation, geometries of an adjacent neighboring area that are within an enlargement distance from the area for which the model-based simulation is being performed.

15           17.    The article of claim 12, wherein said programming instructions further enable the computer system to determine if each area is equivalent to any one of the previously corrected areas, prior to the application of the corrections, for OPC purposes.

20           18.    The article of claim 17, wherein said programming instructions further enable the computer system to selectively tag geometries of each area with tag identifiers to characterize the geometries to facilitate efficient performance of said equivalency determination.

25           19.    The article of claim 12, wherein said programming instructions further enable the computer system to save the determined OPC, and pre-correction states of the corresponding corrected areas.

30           20.    The article of claim 19, wherein said programming instructions enable the computer system to retrieve for the second area, the saved OPC determined for the first area, and to apply the retrieved OPC to the second area.

35           21.    The article of claim 12, wherein said programming instructions further enable the computer system to save the corrected areas in their corrected states as well as their pre-correction states.

5           22.   The article of claim 21, wherein said programming instructions further enable the computer system to retrieve for the second area, the corrected first area in its corrected state, and to generate a copy for use as the corrected second area.

10           23.   A computer system comprising:

          a storage medium having stored therein a plurality of programming instructions; and

15           a processor coupled to the storage medium to execute the programming instructions to determine OPC for an IC mask layout on an area-by-area basis, each area being an aerial subset of the IC mask layout, wherein the determined OPC for a first area are reused on a second area if the second area is considered to be equivalent to the first area for OPC purposes.

25           24.   The computer system of claim 23, wherein the processor executes the programming instructions to iteratively determine the OPC for each area employing model-based simulations.

30           25.   The computer system of claim 24, wherein the processor executes the programming instructions to perform resist as well as optical model-based simulations.

35           26.   The computer system of claim 25, wherein the processor executes the programming instructions to perform the resist model-based simulations employing a variable threshold resist model.

40           27.   The computer system of claim 24, wherein the processor executes the programming instructions to perform a model-based simulation for an area, including geometries of an adjacent neighboring area that are within an enlargement distance from the area for which the model-based simulation is being performed.

5           28.    The computer system of claim 23, wherein the processor executes the programming instructions to determine if each area is equivalent to any one of the previously corrected areas, prior to the application of the corrections, for OPC purposes.


10           29.    The computer system of claim 28, wherein the processor executes the programming instructions further to selectively tag geometries of each area with tag identifiers to characterize the geometries to facilitate efficient performance of said equivalency determination.

15           30.    The computer system of claim 23, wherein the processor further executes the programming instructions to save the determined OPC, and pre-correction states of the corresponding corrected areas.

20           31.    The computer system of claim 30, wherein the processor further executes the programming instructions to retrieve for the second area, the saved OPC determined for the first area, and to apply the retrieved OPC to the second area.

25           32.    The computer system of claim 23, wherein the processor further executes the programming instructions to save the corrected areas in their corrected states as well as their pre-correction states.

30           33.    The computer system of claim 32, wherein the processor further executes the programming instructions to retrieve for the second area, the corrected first area in its corrected state, and to generate a copy for use as the corrected second area.

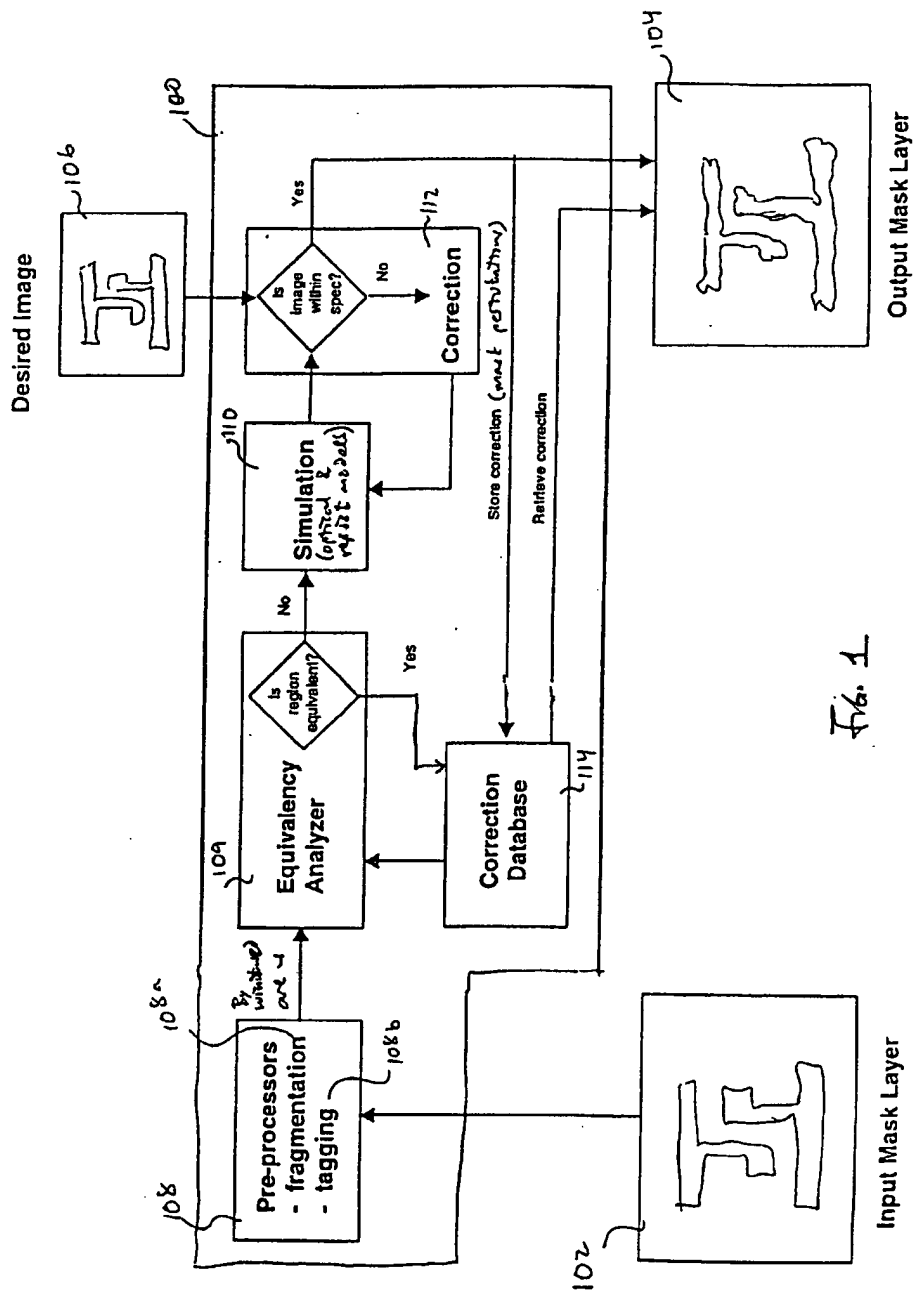

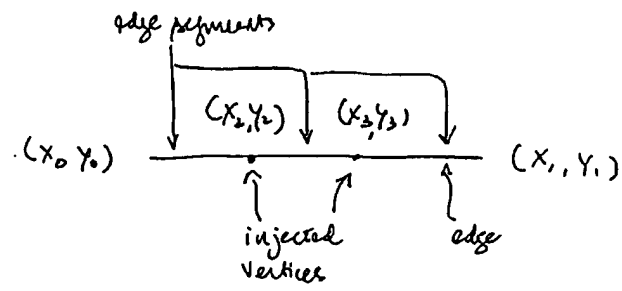


FIG. 2

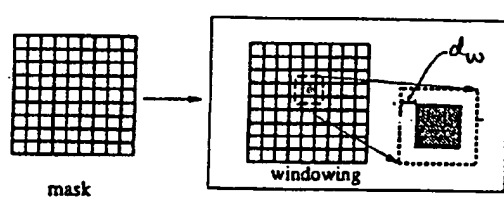


FIG. 3a

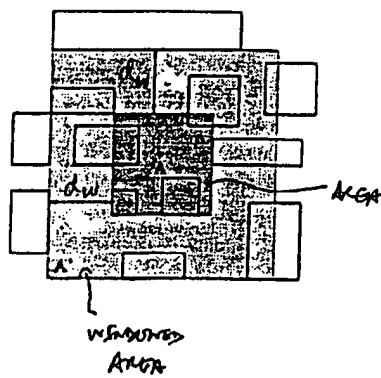


FIG. 3b

## CORRECTION DATABASE

UNCORRECTED WINDOWED AREA	CORRECTED WINDOWED AREA
$\{ \text{POLY1}(x_1, y_1, x_2, y_2 \dots \text{TAG1}),$ $\text{PATH1}(x_3, y_3 \dots \text{TAG2}),$ $\text{POLY2}(x_4, y_4 \dots \text{TAG3}),$ $\dots \}$	$\{ \text{POLY1}'(x_1', y_1', x_2', y_2', \dots \text{TAG1}'),$ $\text{PATH1}'(x_3', y_3', \dots \text{TAG2}'),$ $\text{POLY2}'(x_4', y_4', \dots \text{TAG3}'),$ $\dots \}$

FIG. 4



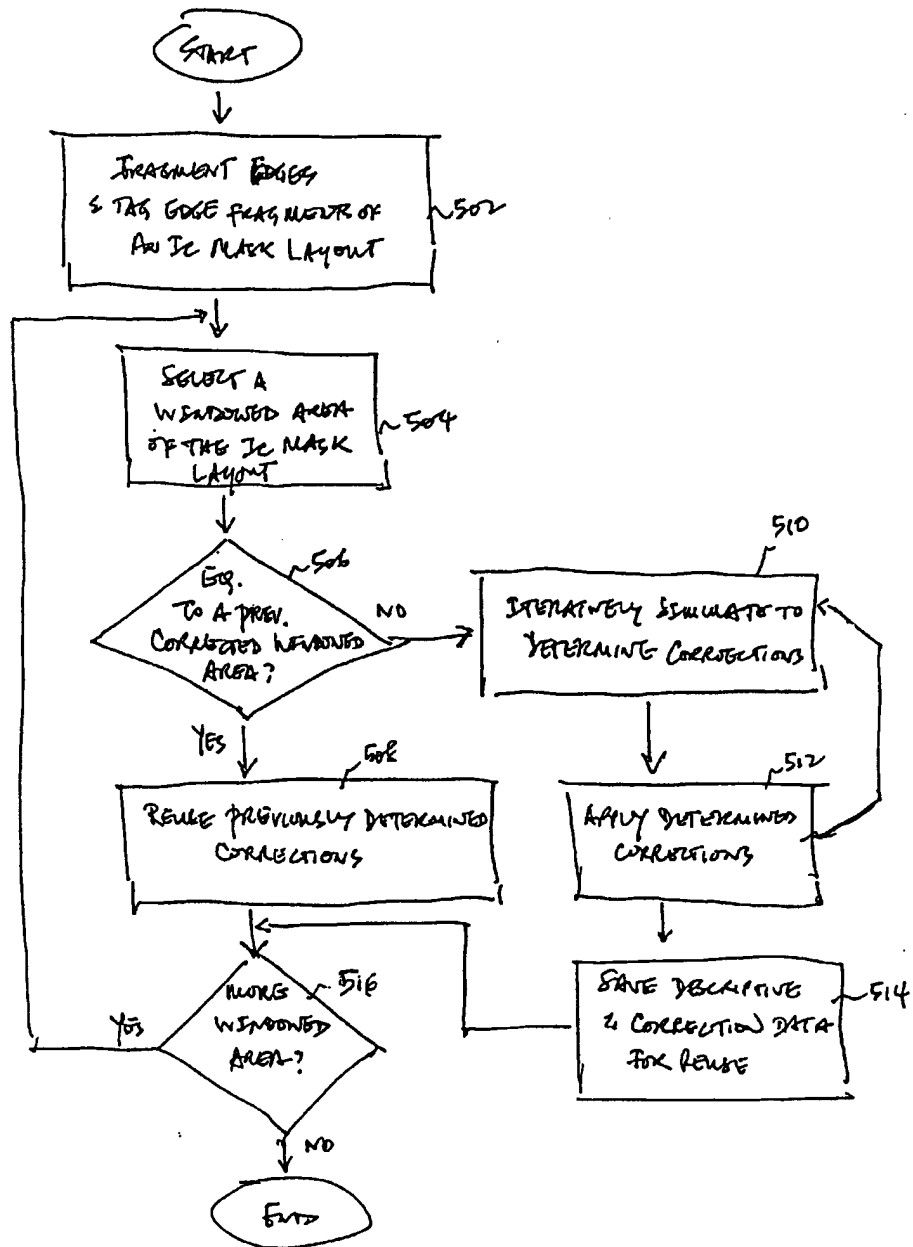


Fig. 5

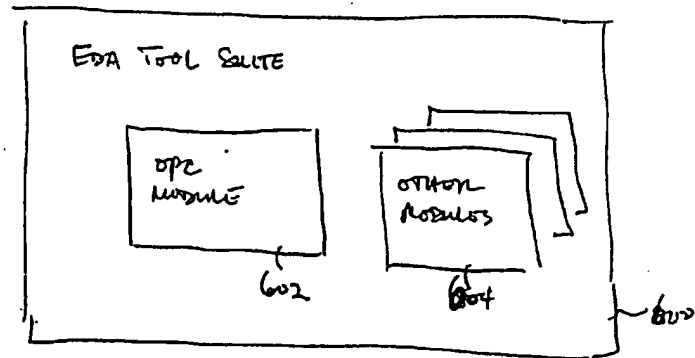


FIG. 6

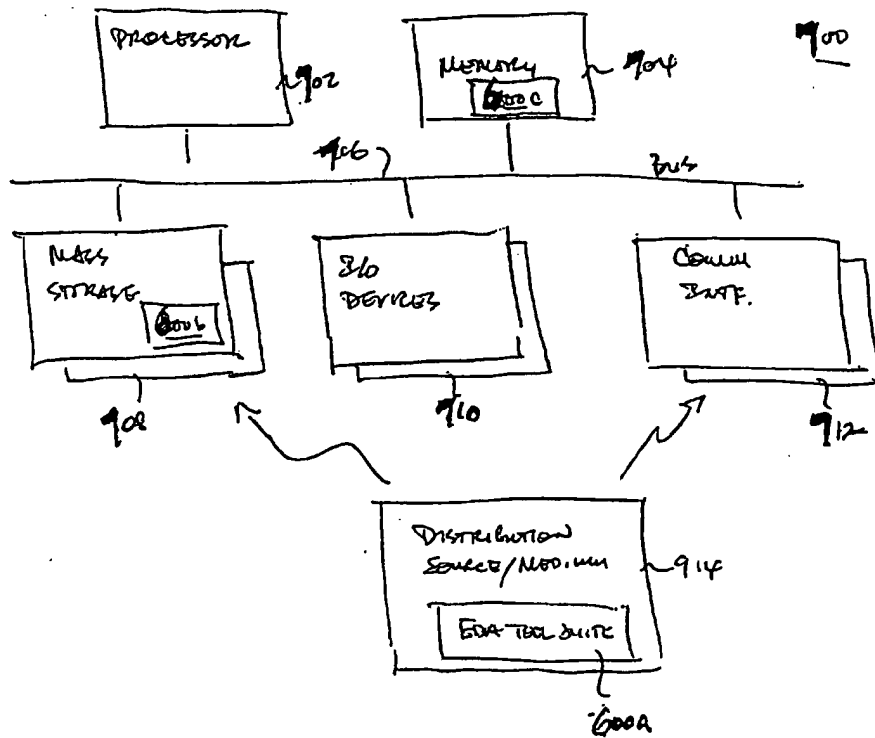


FIG. 7

Int'l. (long) Application No  
PCT/US 00/05658

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 G03F7/20

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 G03F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

INSPEC, WPI Data, PAJ, EPO-Internal, IBM-TDB

### C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	MAURER W ET AL: "Process proximity correction using an automated software tool" , OPTICAL MICROLITHOGRAPHY XI, SANTA CLARA, CA, USA, 25-27 FEB. 1998 , PROCEEDINGS OF THE SPIE - THE INTERNATIONAL SOCIETY FOR OPTICAL ENGINEERING, 1998, SPIE-INT. SOC. OPT. ENG, USA, PAGE(S) 245 - 253 XP000933630 ISSN: 0277-786X	1-4,6, 8-15,17, 19-26, 28,30-33
Y	the whole document	7,18,29

☒ Further documents are listed in the continuation of box C.

 Patent family members are listed in annex.

\* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

☐ document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\* Later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention.

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

**'a'** document member of the same patent family

Date of the actual completion of the international search

**25 August 2000**

Date of mailing of the international search report

31/08/2000

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

**Authorized officer**

Haenisch, U

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 00/05658

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	MAURER W ET AL: "Evaluation of a fast and flexible OPC package: OPTISSIMO", 16TH ANNUAL SYMPOSIUM ON PHOTOMASK TECHNOLOGY AND MANAGEMENT, REDWOOD CITY, CA, USA, 18-20 SEPT. 1996, PROCEEDINGS OF THE SPIE - THE INTERNATIONAL SOCIETY FOR OPTICAL ENGINEERING, 1996, SPIE-INT. SOC. OPT. ENG, USA, PAGE(S) 412 - 418 XP000933628 ISSN: 0277-786X the whole document	1-4,6, 8-15,17, 19-26, 28,30-33
Y	OHNUMA H ET AL: "Lithography computer aided design technology for embedded memory in logic" MICROPROCESSES AND NANOTECHNOLOGY '98. 1998 INTERNATIONAL MICROPROCESSES AND NANOTECHNOLOGY CONFERENCE, KYOUNGJU, SOUTH KOREA, 13-16 JULY 1998, vol. 37, no. 12B, pages 6686-6688, XP000880238 Japanese Journal of Applied Physics, Part 1 (Regular Papers, Short Notes & Review Papers), Dec. 1998, Publication Office, Japanese Journal Appl. Phys, Japan ISSN: 0021-4922 page 6687, column 1, line 1 - line 25	7,18,29